


# GALLERIA

made in  
**HOLLAND**

**INTER  
NOVA**  
PROFESSIONAL LIGHTING



**Housing**  
**RAL colour**  
**Fixture type**  
**Module**  
**Driver**  
**Lumen output**

Aluminium, die cast  
9004 (Black), 9003 (White)  
3-phase track light  
Philips Fortimo SLM LED module  
Philips Xitanium LED Driver  
1100lm, 2000lm  
2700K, 3000K, 3500K, 4000K, 5700K

**CCT**  
**CRI**  
**Beam angles**

>80Ra, >90Ra  
15°, 20°, 30°

**Adapter**  
**Rotatable**  
**Tiltable**

Powergear® 3-phase adapter included  
350°  
90°

**Expected Lifetime**  
**Photobiological safety**  
**Power factor**

L80B10 >70.000 / L90B50 >50.000h  
RG1 unlimited  
> 0.9

**Colour consistency**  
**Warranty**

3 SDCM  
5 years warranty on LED module and driver

Net Weight	Dimensions carton L x W x H	Qty outer carton
691 grams	14 x 15 x 17 cm	12

## LED MODULES

Standard Premium HE+



## LED MODULE OPTIONS

## OPTIONS

Dimmable Casambi




Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Philips Fortimo SLM G7	1100lm	7W	157	827, 830	>80Ra						
Philips Fortimo SLM G7	1100lm	6W	183	840, 857	>80Ra						
Philips Fortimo SLM G7	1100lm	8W	138	927, 930, 930PW	>90Ra						
Philips Fortimo SLM G7	1100lm	7W	157	935PW, 940PW	>90Ra						
Philips Fortimo SLM G7	2000lm	15W	167	827, 830	>80Ra						
Philips Fortimo SLM G7	2000lm	12W	167	840, 857	>80Ra						
Philips Fortimo SLM G7	2000lm	15W	133	927, 930, 930PW	>90Ra						
Philips Fortimo SLM G7	2000lm	14W	143	935PW, 940PW	>90Ra						

LED modules  
Standard: CRI>80 and >90 in CCT 2700K, 3000K, 3500K, 4000K  
Premium White (PW): for fresh white and depth of colour in retail environments  
1) Lumen output of LED module (COB)  
2) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.  
The power of the complete fixture will be slightly higher due to the power consumption of the driver.  
3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.  
Technical data can be changed by Internova without prior notice.


**It all starts with light**

## ARTICLE CODE STRUCTURE

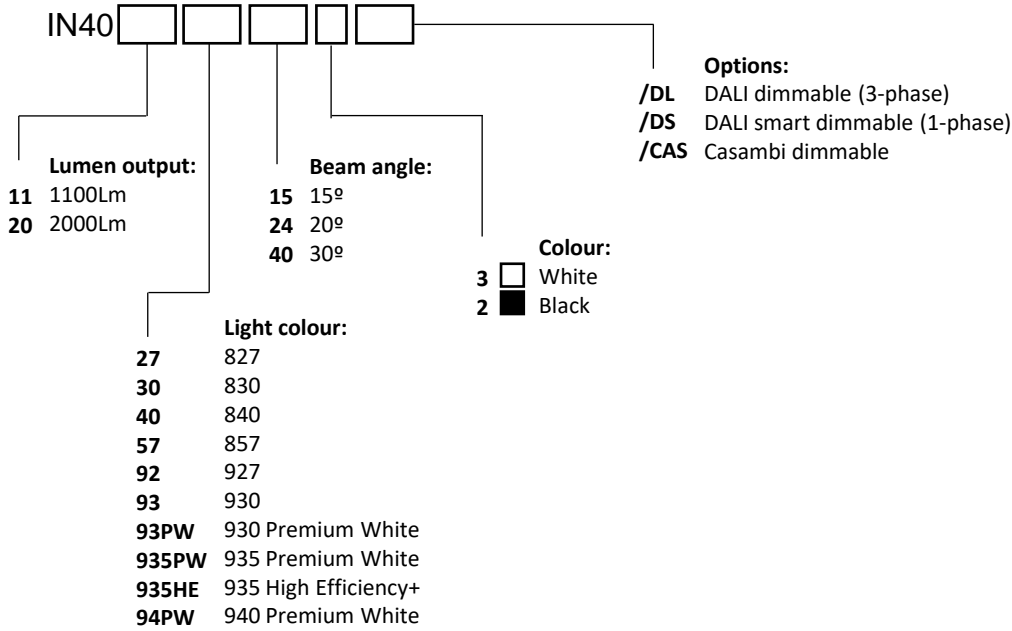


## POLAR DIAGRAMS


15°

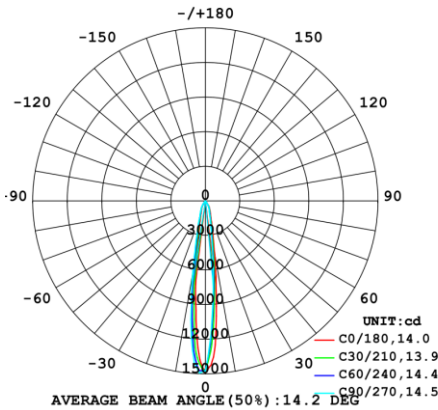

20°

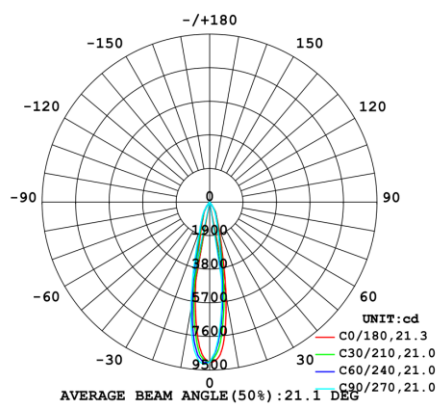

30°

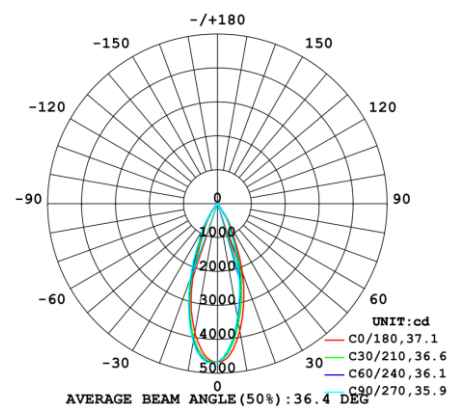

**It all starts with light**